

## Switching Mode Power Supply with Charger and Fault Indication

6


### Features

- Universal AC Input (AC100~240V)
- 50~150 Watts Output Range in the series
- Built-in Charger for Back-up Battery
- LED Indications for AC/DC/Battery
- Relay Output for Fault Reporting
- Protection :
  1. Over Load
  2. Over Voltage
  3. Short Circuit
  4. Over Temperature and
  5. Battery Low Voltage



Specification	MHP50-12B	MHP50-24B	MHP100-12B	MHP100-24B	MHP150-12B	MHP150-24B
<b>Input</b>	AC100~240V 50/60Hz					
<b>Output</b>	DC13.8V/4A	DC27.6V/2A	DC13.8V/7.5A	DC27.6V/4A	DC13.8V/11A	DC27.6V/5.5A
<b>Power</b>	50W		100W		150W	
<b>Batt. Charger</b>	DC 14.5V/ 300mA	DC 28.2V/ 300mA	DC 14.5V/ 500mA	DC 28.2V/ 500mA	DC 14.5V/ 500mA	DC 28.2V/ 500mA
<b>Dimensions</b>	119W x 106H x 48D mm			149W x 145H x 56D mm		

### Enclosure for MHP

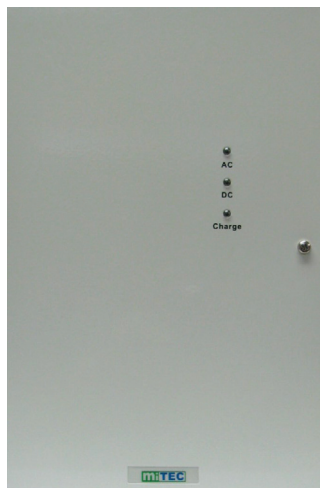

Specification	MHP-S/BOX	MHP-M/BOX	MHP-L/BOX
<b>Dimensions</b>	210W x 280H x 80D mm	210W x 332H x 80D mm	322W x 322H x 80D mm
<b>Associate MHP</b>	<ul style="list-style-type: none"> <li>• MHP50-12B</li> </ul>	<ul style="list-style-type: none"> <li>• MHP100-12B</li> <li>• MHP150-12B</li> </ul>	<ul style="list-style-type: none"> <li>• MHP50-24B</li> <li>• MHP100-24B</li> <li>• MHP150-24B</li> </ul>