

LCD display for MC 24V series



Features

- LCD graphical main menu, for real-time monitoring of real-time data and operating status of the controller.
- Two-button design for menu viewing and parameters setting, easy to operate.
- No external power supply is required, and the LCD unit can be powered by connecting it to the controller via a communication cable.
- Embedded installation.
- Industrial grade design, allowing for use in a variety of harsh environments.


Product picture



Installation Dimensions

Product dimensions: $104.5 \times 55.5 \times 11.8\text{mm}$

Installation dimensions: $96 \times \varnothing 3.5\text{mm}$

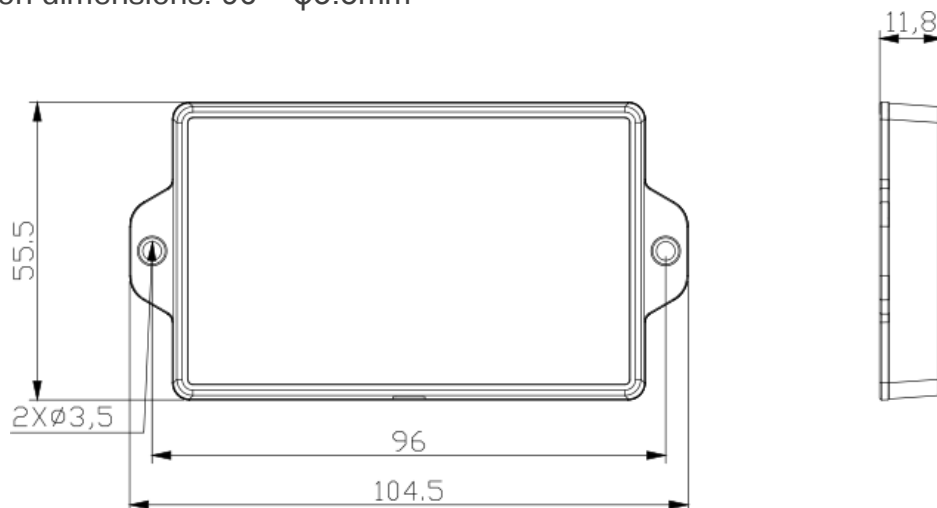

Technical Parameters

Items	Parameter values
Applicable models of controller	p.n.435008 p.n.435009
Input voltage	5V-12V
Standby power consumption	< 0.03W
Operating power consumption	< 0.04W
Fixed baud rate	9600bps
Communication mode	TTL
Interface type	PH2.0
Connection cable length	1.5M
Operating temperature	-35°C ~ +65°C
IP rating	IP32
Weight	90g
Altitude	≤ 3000M
Dimensions	104.5 × 55.5 × 11.8mm