



# EVAC System Remote Paging Microphone

## EVAC-16RM



### Features


- \* Support 16 zones, group paging button.
- \* System max support 32 remote paging microphones.
- \* Microphone support anti-misoperation plug.
- \* Support line audio input, and input/output volume is adjustable.
- \* Paging priority can be set by software.
- \* Support 24 DC power supply.
- \* Remote MIC/Controller has 2 cascade interfaces, 1 in and 1 out.
- \* Optional paging to the main controller or extension controller.

### Specifications

Model	EVAC-16RM
MIC	Capacitor Microphone
MIC Sensitivity	10mV/600Ω
MIC Frequency Response	200Hz~10KHz
MIC SNR	>65dB
Line Input Sensitivity	775mV/10KΩ
line Input Frequency Response	80Hz~16KHz
Line Input SNR	>70dB
Signal Output	1V
Distortion	<1% (Rated output power ), 1KHz
Supply Voltage	24V DC
Dimension (L x W x D)	256 x 52 x 149mm
Net Weight	1.3kg



### Back Panel

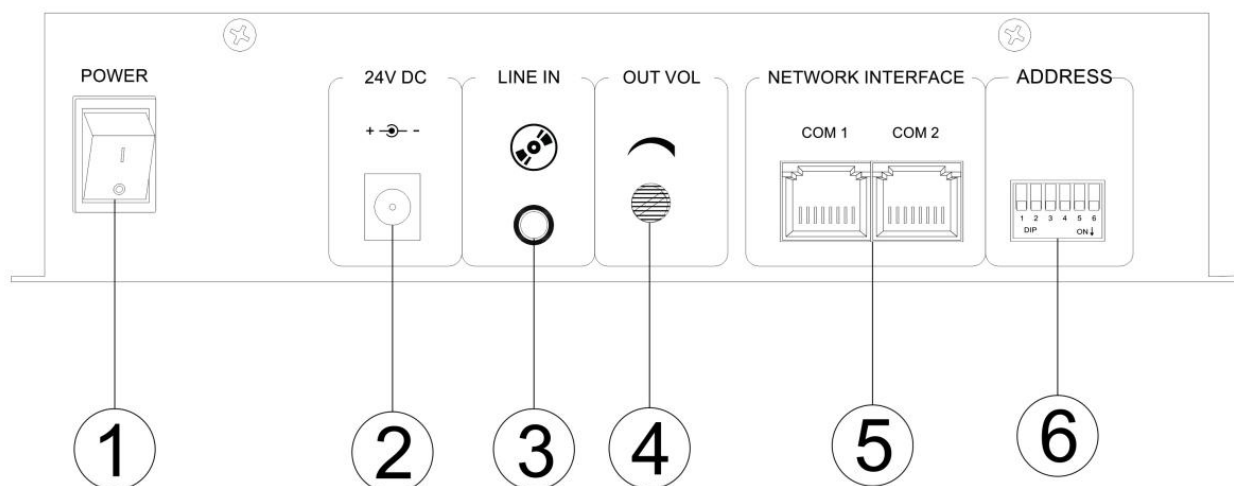

### Connectors

- \* Power switch
- \* DC voltage input
- \* Line Sound source input
- \* Output volume adjustment
- \* CAN Communication network port
- \* Dial code setting: (Upward: Use Down: Close)