


F.K ITEM NO. HSR175-5C TO HSR175-8C




RMS 30 W




Technical data	HSR175-5
Load rating输出额定功率	30W
Frequency range频率范围	100-20KHZ
SPL(@1W/m)灵敏度 (1W/m)	85dB
SpeakerΦand impedance低音与阻抗	5 1/4"8ohms
Tweeter高音	1" Mylar
DimensionΦ install depth尺寸直径, 深度	Φ214x88.9mm
Install DimensionΦ安装尺寸	Φ170mm
Material Colour材料, 颜色	ABS black

RMS 40 W

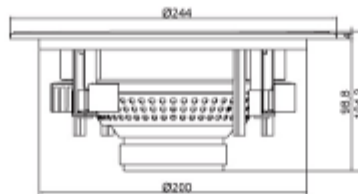

Technical data	HSR175-6
Load rating输出额定功率	40W
Frequency range频率范围	70-20KHZ
SPL(@1W/m)灵敏度 (1W/m)	88dB
SpeakerΦand impedance低音与阻抗	6 1/2"8ohms
Tweeter高音	1" Mylar
DimensionΦ install depth尺寸直径, 深度	Φ244x104.3mm
Install DimensionΦ安装尺寸	Φ200mm
Material Colour材料, 颜色	ABS black

RMS 50 W

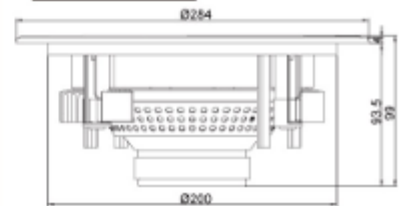

Technical data	HSR175-8
Load rating输出额定功率	50W
Frequency range频率范围	50-20KHZ
SPL(@1W/m)灵敏度 (1W/m)	90dB
SpeakerΦand impedance低音与阻抗	8"8ohms
Tweeter高音	1" Mylar
DimensionΦ install depth尺寸直径, 深度	Φ284x99mm
Install DimensionΦ安装尺寸	Φ200mm
Material Colour材料, 颜色	ABS black