



Description


This model series has a high-quality 2-way coaxial speaker. This 2-way coaxial speaker has a very wide band basic membrane with a separate high toner integrated. This coaxial speaker fulfills the professional demand for sound pressure and tone reproduction. Maximum capacity 40 W. A high-quality matching transformer supplies best music and speech quality.

This speaker has the most modern and easy fitting method, a quick fastening clasp. It sets new standards in security and easiness. Four screws to mount or dismount and lifting off the grille (with a screwdriver) is all that is necessary.


The installation frame is made of high-quality plastic, the grille of coated steel. The construction is burgle proof and impact resistant.

Please consider the following features:


- Modern, discreet design with a rim height of approx. 2 mm.
- The speaker is available impregnated, with a specially prepared chassis and matching transformer.



Technical data	HSR108-5T
Load rating	20 W
Transformer tappings at 100V	20-10-5 W
Frequency range	70-20KHz
SPL(@1W/m)	88dB
Speaker Ø and Impedance	5 1/4" / 8 ohms, 2-way
Dimension Ø, Install depth	Ø 202 (78)mm
Material, Colour	ABS white

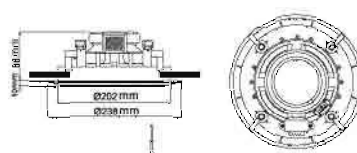

Technical data	HSR108-6T
Load rating	30 W
Transformer tappings at 100V	30-15-7.5 W
Frequency range	50-20KHz
SPL(@1W/m)	90dB
Speaker Ø and Impedance	6 1/2" / 8 ohms, 2-way
Dimension Ø, Install depth	Ø 238 (86)mm
Material, Colour	ABS white

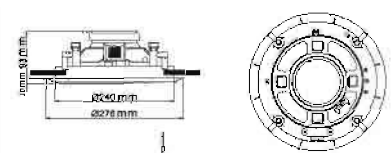

Technical data	HSR108-8T
Load rating	40 W
Transformer tappings at 100V	40-20-10 W
Frequency range	40-20KHz
SPL(@1W/m)	92dB
Speaker Ø and Impedance	8" / 8 ohms, 2-way
Dimension Ø, Install depth	Ø 276 (93)mm
Material, Colour	ABS white