



**5W**

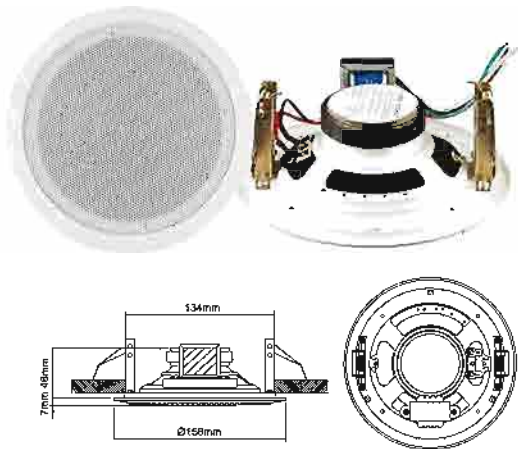


Technical data	HSR163-5T
Load rating	5W
Transformer tapings at 100V	5-2.5-1.25 W
Frequency range	180-15KHz
SPL(@1W/m)	90dB
Speaker Ø and Impedance	5" / 8 ohms
Dimension Ø, Install depth	Ø158 (46)mm
Weight, Colour	appr 0.58kg white

**10W**

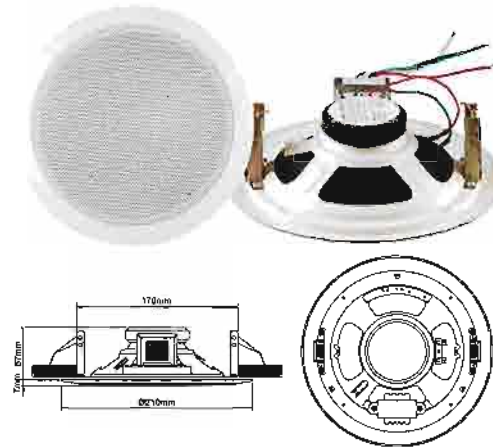

Technical data	HSR163-6T
Load rating	10W
Transformer tapings at 100V	10-5-2.5 W
Frequency range	150-15KHz
SPL(@1W/m)	92dB
Speaker Ø and Impedance	6 1/2" / 8 ohms
Dimension Ø, Install depth	Ø210 (57)mm
Weight, Colour	appr 0.76kg white

**30W**

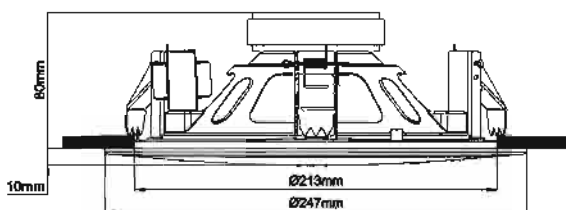

Technical data	HSR163-8T
Load rating	30W
Transformer tapings at 100V	30-15-7.5 W
Frequency range	120-15KHz
SPL(@1W/m)	94dB
Speaker Ø and Impedance	8" / 8 ohms
Dimension Ø, Install depth	Ø247 (90)mm
Weight, Colour	appr 1.81kg white