


### Product specifications:

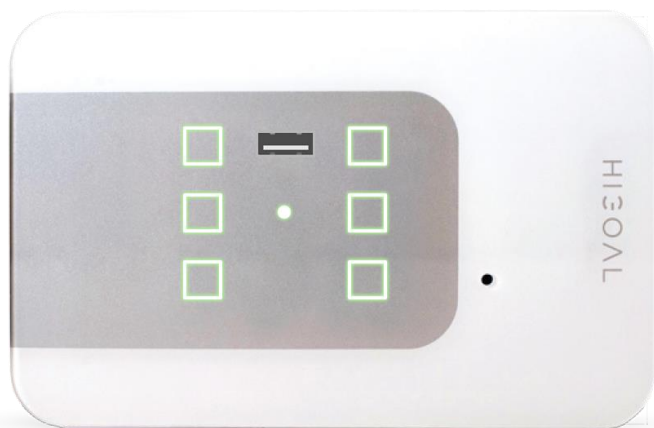

**USB connector:** 5V/2A

**IR SENSOR:** Built-in

**Mini speaker:** Built-in

**Rated Voltage:** AC 110-230V, 50/60 Hz

**Standby current:** 60ma

**Updates:** Firmware Over The Air (FOTA)

**Front Panel:**

- 1.5 mm glass cover
- 6 operating buttons + 1 function button
- RGB LED indicator for each button

**LED Indicator:** Different color indicator for each operating mode

**Dip Switch:** 10 mini switches

**Operating Frequency:** 2400-2483 MHz

**Transmission Power:** 0.04w

**Transmission Bandwidth:** 20 MHz

**Wi-Fi Frequency:** 2.4GHz 802.11b/g/n

**Modulation:** DSSS, CKK, OFDM

**Weight:** 0.167 KG

**Energy Metering Range:** 50-3600w

**Outputs:** 6 x 5A (each)

**Options:**

- 6 operations buttons:
  - 4 programmable outputs
  - 2 for additional functions (Scenario, Duplicate)
- On/off, momentary, curtain, Scenario, Duplicate
- 4 On/Off or 2 electric shutters or any other combination

