


Product specifications:

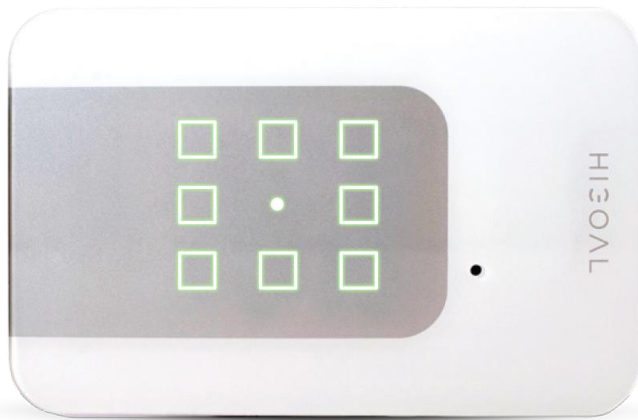

IR SENSOR:	Built-in
Mini speaker:	Built-in
Rated Voltage:	AC 110-230V, 50/60 Hz
Standby current:	60ma
Updates:	Firmware Over The Air (FOTA)
Front panel:	<ul style="list-style-type: none"> • 1.5 mm glass cover • 8 operating buttons + 1 function button • RGB LED indicator for each button
LED indicator:	Different color indicator for each operating mode
Dip Switch:	10 mini switches
Operating frequency:	2400-2483 MHz
Transmission power:	0.04w
Transmission bandwidth:	20 MHz
Wi-Fi Frequency:	2.4GHz 802.11b/g/n
Modulation:	DSSS, CKK, OFDM
Weight:	0.167 KG
Energy metering range:	50-3600w

Outputs: 6 x 5A (each)

Options:

- 8 operations buttons:
 - 6 programmable outputs
 - 2 for additional functions (Scenario, Duplicate)
- On/off, momentary switch, curtain, Scenario, Duplicate
- 6 On/Off or 3 electric shutters or any other combination

